
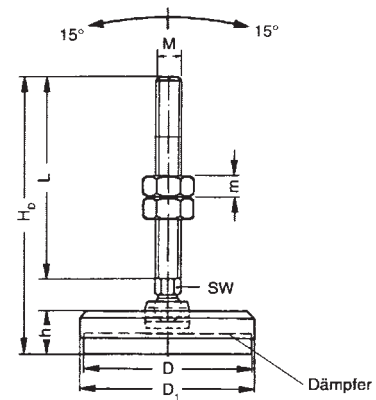


Maschinenfüße, rostfrei

Werkstoff

- Fußteller: 1.4301, rostfrei
- Spindel: 1.4305, rostfrei
- Gelenkstück: Delrin
- Dämpfer: NBR Gummi, ölbeständig, 70 Shore A

inklusive 2 Sechskantmuttern DIN 934

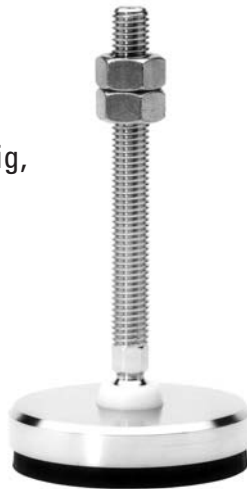


Bestell-Nr.	M	D	D ₁	H	h	H ₀	L	m	m ₁	SW	Belastung N	Gewicht kg
5060.08 100	M 8	50	52	—	12,5	82,5	60	6,5	—	7	1.500	0,152
5060.10 100	M 10	60	62	—	13,0	106,0	80	8,0	—	8	2.300	0,248
5060.12 100	M 12	70	73	—	18,0	135,0	100	10,0	—	10	3.300	0,480
5060.16 100	M 16	80	84	—	18,0	154,0	115	13,0	—	13	6.000	0,716
5060.20 100	M 20	100	104	—	22,0	198,0	150	16,0	—	17	9.400	1,370
5060.24 100	M 24	115	119	—	24,0	236,0	180	18,0	—	19	13.000	2,175

Werkstoff

- Fußteller: 1.4301, rostfrei
- Spindel: 1.4305, rostfrei
- Dämpfer: NBR Gummi, ölbeständig, 70 Shore A

inklusive 1 Sechskantmutter DIN 934

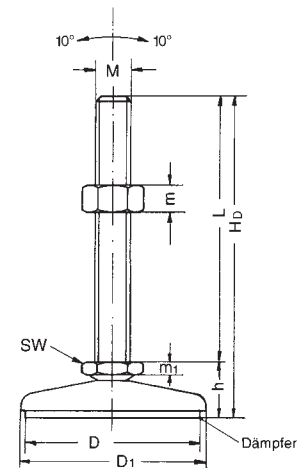

Bestell-Nr.	M	D	D ₁	H	h	H ₀	L	m	m ₁	SW	Belastung N	Gewicht kg
MF 8.40 SS	M 8	37	40	—	13	73	60	6,5	2,6	13	2.000	0,066
MF 10.60 SS	M 10	57	60	—	18	88	70	8,0	3,2	17	3.000	0,184
MF 12.60 SS	M 12	57	60	—	18	95	80	10,0	3,7	19	4.000	0,226
MF 14.80 SS	M 14	75	80	—	26	126	100	11,0	4,4	22	10.000	0,472
MF 16.80 SS	M 16	75	80	—	26	146	120	13,0	5,0	24	15.000	0,530
MF 20.100 SS	M 20	95	100	—	30	180	150	16,0	6,5	30	20.000	0,924
MF 24.100 SS	M 24	95	100	—	30	210	180	18,0	7,5	36	25.000	1,250